



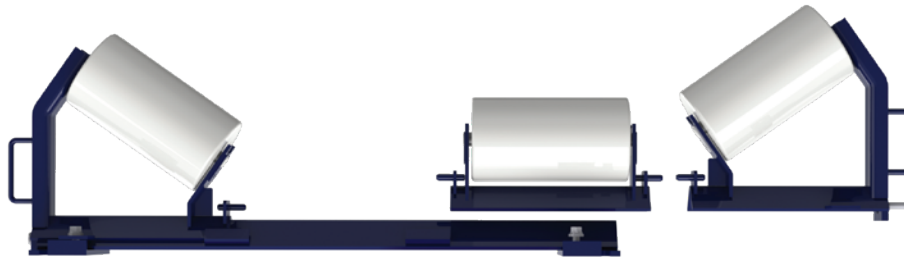

## Simple Slide Idler

Superior product. Simple installation.

Installation and maintenance are easy when you use Benetech's Simple Slide Idlers. Roller frames slide into place without the need to remove adjacent idlers, resulting in ideal serviceability and improved safety. The compact size of the frames allows for placement even in confined spaces, assuring that you are getting the belt support you need.

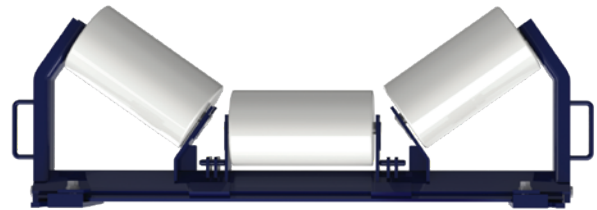

### Great in Confined Spaces

Roller Frames only need 8" (200mm) of width when using 6" (150mm) rollers

### Easy Installation and Service

No need to raise belt or remove adjacent idlers

### Improved Safety

Slide-out/ slide-in roller frames allow for safe maintenance

- Available with standard or wide base frames
- Comes in any belt width and troughing angle
- Utilize impact or steel rolls
- CEMA class A, B, C, D, or E



**Impact Rolls**

# Simple Slide Questionnaire

## Rolls


Steel or impact rollers: \_\_\_\_\_

CEMA Class: \_\_\_\_\_

Roll Diameter: \_\_\_\_\_

Belt Width: \_\_\_\_\_

Troughing Angle: \_\_\_\_\_

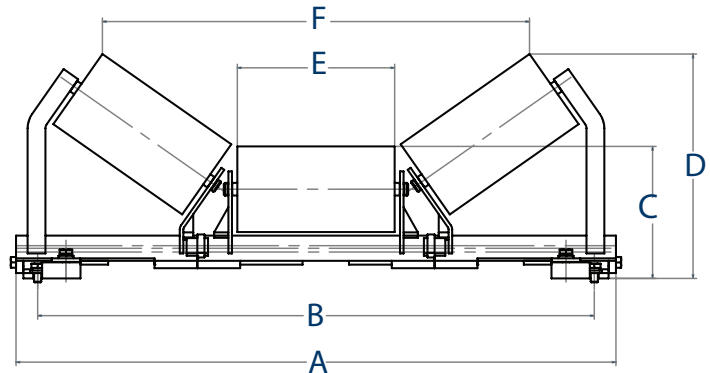

## Standard Rolls

Belt Width in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	Part Number	CEMA D6
24 (600)	35 (889)	33 (838)	9 (229)	14.25 (362)	9 (229)	25 (635)	BCISOASC6B024Tyy	BCISOASD6B024Tyy
30 (750)	41.5 (1054)	39 (991)	9.125 (232)	15.75 (400)	11 (279)	31 (787)	BCISOASC6B030Tyy	BCISOASD6B030Tyy
36 (900)	48 (1219)	45 (1143)	9.125 (232)	17.125 (435)	13.25 (337)	37 (940)	BCISOASC6B036Tyy	BCISOASD6B036Tyy
42 (1050)	53.5 (1219)	51 (1295)	9.5 (241)	18.5 (470)	15.5 (394)	42 (1067)	BCISOASC6B042Tyy	BCISOASD6B042Tyy
48 (1200)	59.5 (1511)	57 (1448)	9.5 (241)	19.625 (498)	17.5 (445)	47.5 (1207)	BCISOASC6B048Tyy	BCISOASD6B048Tyy
54 (1350)	65.5 (1664)	63 (1600)	9.5 (241)	20.5 (521)	19.75 (501.65)	53 (1346)	BCISOASC6B054Tyy	BCISOASD6B054Tyy
60 (1500)	71.5 (1816)	69 (1752)	9.5 (241)	22.25 (565)	21.75 (552)	59.5 (1511)	BCISOASC6B060Tyy	BCISOASD6B060Tyy

\*Tyy= Trough Angle

\*Other Cema ratings available, please contact your Benetech Representative for Pricing

## Impact Rolls

Belt Width in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	Part Number	CEMA D6
24 (600)	35 (889)	33 (838)	9 (229)	14.25 (362)	9 (229)	25 (635)	BCISOAIC6B024Tyy	BCISOAID6B024Tyy
30 (750)	41.5 (1054)	39 (991)	9.125 (232)	15.75 (400)	11 (279)	31 (787)	BCISOAIC6B030Tyy	BCISOAID6B030Tyy
36 (900)	48 (1219)	45 (1143)	9.125 (232)	17.125 (435)	13.25 (337)	37 (940)	BCISOAIC6B036Tyy	BCISOAID6B036Tyy
42 (1050)	53.5 (1219)	51 (1295)	9.5 (241)	18.5 (470)	15.5 (394)	42 (1067)	BCISOAIC6B042Tyy	BCISOAID6B042Tyy
48 (1200)	59.5 (1511)	57 (1448)	9.5 (241)	19.625 (498)	17.5 (445)	47.5 (1207)	BCISOAIC6B048Tyy	BCISOAID6B048Tyy
54 (1350)	65.5 (1664)	63 (1600)	9.5 (241)	20.5 (521)	19.75 (501.65)	53 (1346)	BCISOAIC6B054Tyy	BCISOAID6B054Tyy
60 (1500)	71.5 (1816)	69 (1752)	9.5 (241)	22.25 (565)	21.75 (552)	59.5 (1511)	BCISOAIC6B060Tyy	BCISOAID6B060Tyy

\*Tyy= Trough Angle

\*Other Cema ratings available, please contact your Benetech Representative for Pricing

### BENETECH

2245 Sequoia Dr. #300  
Aurora, IL 60506

+1 (630) 844 -1300  
info@benetechusa.com  
www.benetechglobal.com

